
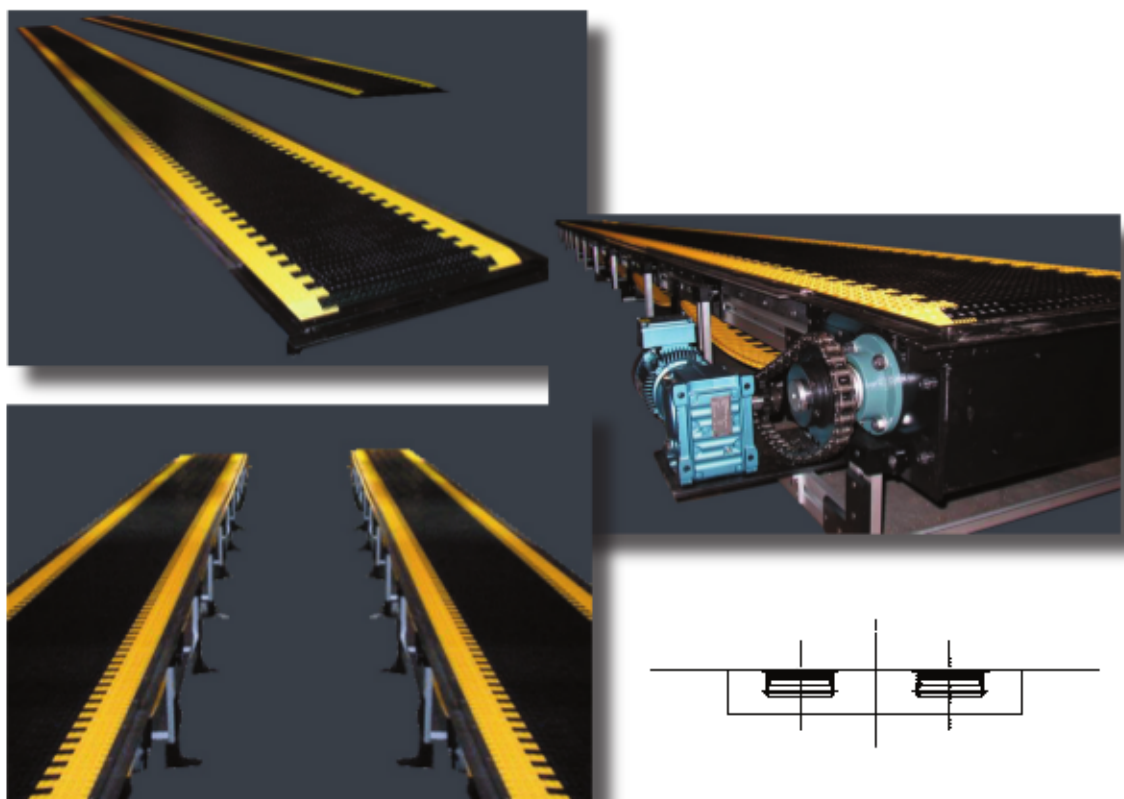


PEOPLE MOVER

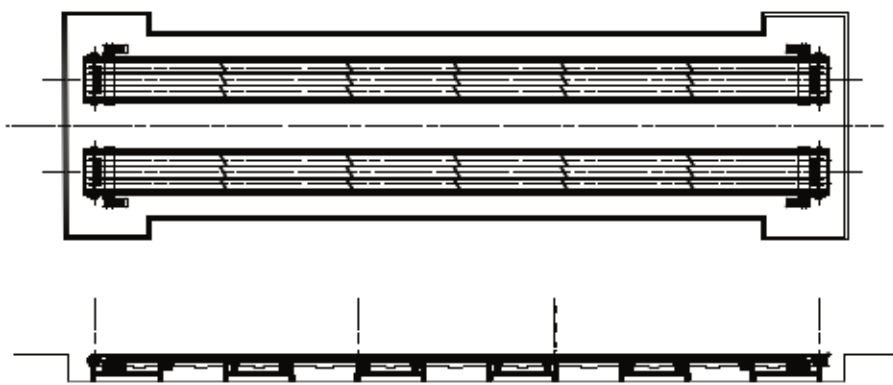

QUALITY CUSTOM ENGINEERED CONVEYOR SYSTEMS

SYSTEM INFORMATION

TECHNICAL DATA

Conveyor Type	Moving Sidewalk
OCC Reference No.	JO3-2155
Available Production Rates (JPH)	20 JPH through 80 JPH
Conveyor Lengths	20 Feet through 100 Feet
Conveyor Widths	2 Feet through 6 Feet
Conveyor Heights	2 Feet and up (pit or platform for safety)
Number of Jobs on Conveyor	(1) Through (10) Operators
Type of Drive	(2) Electric drive system
H.P. Used	3 HP main drive
H.P. Used	3 HP tension drive @ 98% speed
Belt Type	Introlox series 400 or equivalent

FEATURES & CAPABILITIES

- System shown is used for the Door Decking System at Chicago Assembly Plant.
- “V” groove cover plates at the end of the sidewalk will allow for nuts and bolts to fall through into a removable tray for ease of maintenance.
- Under the “V” groove cover plates are (2) photo eyes that will allow debris to pass by, but the emergency system will shut down the sidewalk if blocked for .25 seconds.
- An Encoder System guarantees that the sidewalk is moving at the same speed as the “work piece conveyor”
- Modular aluminum frame construction with antistatic interchangeable slider bedding.